





Chain Coupling



Straight Bore Chain Coupling

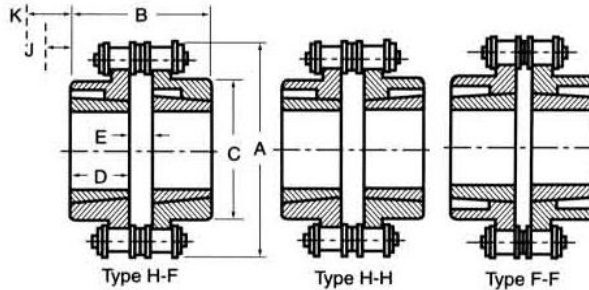

Taper-lock Chain Coupling

Coupling	Straight Bore		Taper-Lock			Max RPM		Weight (Lbs.)	
	Min	Max	Bush.	Min.	Max.	Without cover	With Cover	Str.	TL
4012	1/2	7/8	-	-	-	875	5000	2.2	-
4016	5/8	1 5/16	1108	1/2	1 1/8	875	5000	3.8	2.7
5012	5/8	1 1/8	-	-	-	875	5000	3.1	-
5016	5/8	1 11/16	-	-	-	800	4000	5.0	-
5018	3/4	2	1610	1/2	1 11/16	800	4000	6.0	6
6018	1	2 7/16	-	-	-	675	3000	9.9	-
6020	1 1/8	2 3/4	2012	1/2	2 1/8	675	3000	12.3	12.7
8018	1 1/8	3 1/8	-	-	-	500	2000	31.1	-
8020	1 1/8	3 9/16	3020	7/8	3 1/4	500	2000	33.5	31.1
10020	2	4 5/8	3535	1 3/16	3 15/16	450	1800	80.0	77.9
12018	2	4 11/16	-	-	-	400	1600	110.0	-
12020	-	-	4040	1 7/16	4 7/16	400	1600	-	135

Dimensions sheet :

Coupling	A	B		C	D		E		K(2)	J(3)
		Str	T-L		Str	T-L	Str	T-L		
4012	2.41	2.53	-	1.41	1.13	-	0.28	-	-	-
4016	3.03	2.53	1.94	1.97	1.13	0.88	0.28	0.19	0.75	0.63
5012	3.00	2.88	-	1.75	1.25	-	0.38	-	-	-
5016	3.91	2.88	-	2.50	1.44	-	0.38	-	-	-
5018	4.19	2.88	2.31	2.97	1.69	1.00	0.38	0.31	1.06	0.41
6018	5.00	3.47	-	3.50	1.88	-	0.47	-	-	-
6020	5.50	3.47	2.94	3.88	2.00	1.25	0.47	0.44	1.38	0.94
8018	6.66	4.59	-	4.56	2.38	-	0.59	-	-	-
8020	7.30	4.59	4.50	5.38	2.63	2.00	0.59	0.50	2.06	1.19
10020	9.13	6.97	7.63	6.72	3.13	3.50	0.72	0.63	2.34	1.31
12018	10.00	7.88	-	6.75	3.50	-	0.86	-	-	-
12020	10.94	-	8.75	7.75	-	4.00	-	0.75	3.38	1.63